

# Bearingless encoders

<b>Incremental, standard reference signal, magnetic</b>	<b>RLI50 (hollow shaft)</b>	<b>Push-pull / RS422</b>
---	-----------------------------	--------------------------



Thanks to its installation depth of only 16 mm, the bearingless magnetic rotary encoder RLI50, comprising a magnetic ring and sensor head, is ideally suited for plants and machinery where space is very tight. The non-contact measuring principle allows for error-free use even under harsh environmental conditions, as well as ensuring a long service life. In contrast to our measuring system RLI20, a single reference signal is also implemented here.

IP68 / IP69k protection, special encapsulation technology and tested resistance to cyclic humidity and damp heat offer the highest levels of reliability, even in exposed outdoor use.

This bearingless encoder can be mounted on shafts with a diameter up to max. 35 mm.



High rotational speed	High protection level	Shock / vibration resistant	Reverse polarity protection

### Hard-wearing and robust

- High shock and vibration resistance.
- Sturdy housing with IP67 protection. Option: special housing for maximum resistance against condensation (IP68 / IP69k, resistance to cyclic humidity acc. to EN 60068-3-38 as well as damp heat acc. to EN 60068-3-78).
- Non-contact measuring system, free from wear, ensures a long service life.

### Fast start-up

- Function display via LED.
- Large mounting tolerance between magnetic band and sensor head.
- Requires very little installation space.
- Slotted hole fixing ensures simple alignment.

### Order code RLI50

<b>8.RLI50</b>	<b>. X 1 X X .</b>	<b>XXXX .</b>	<b>XXXX</b>
Type	a b c	d	e

#### a Model

- 1 = IP67, standard
- 2 = IP68 / IP69k and humidity tested acc. to EN 60068-3-38, EN 60068-3-78

#### b Output circuit / Supply voltage

- 1 = RS422 / 4.8 ... 26 V DC
- 2 = Push-pull / 4.8 ... 30 V DC

#### c Type of connection

- 1 = radial cable, 2 m [6.56'] PUR
- A = radial cable, special length PUR \*)
- \*) Available special lengths <sup>1)</sup> (connection type A): 3, 5, 8, 10, 15, 20 m [9.84, 16.40, 26.25, 32.80, 49.21, 65.62']  
order code expansion .XXXX = length in dm  
ex.: 8.RLI50.111A.2000.0080.0030 (for cable length 3 m)

#### d Pulses per revolution <sup>2)</sup>

- 1000, 1024, 2000, 2048, 3600

#### e Bore diameter

- |                                    |                         |
|------------------------------------|-------------------------|
| 0060 = 6 mm [0.24"]                | 0158 = 5/8"             |
| 0080 = 8 mm [0.32"]                | 0254 = 1" <sup>3)</sup> |
| 0100 = 10 mm [0.39"]               |                         |
| 0120 = 12 mm [0.47"]               |                         |
| 0150 = 15 mm [0.59"]               |                         |
| 0200 = 20 mm [0.79"]               |                         |
| 0250 = 25 mm [0.98"] <sup>3)</sup> |                         |
| 0300 = 30 mm [1.18"] <sup>3)</sup> |                         |
| 0350 = 35 mm [1.34"] <sup>4)</sup> |                         |

1) Cable lengths >10 m only possible with supply voltage >10 V.  
 2) Other pulse rates on request.  
 3) Only possible for pulse rates 1024, 2048 and 3600.  
 4) Only possible for pulse rate 3600.

# Bearingless encoders

<b>Incremental, standard reference signal, magnetic</b>	<b>RLI50 (hollow shaft)</b>	<b>Push-pull / RS422</b>
---	-----------------------------	--------------------------

Accessories / Display type 572	Order no.
<b>Position display, 6-digit</b>  with 4 fast switch outputs and serial interface with 4 fast switch outputs and serial interface and scalable analog output	<b>6.572.0116.D05</b>
	<b>6.572.0116.D95</b>
<b>Position display, 8-digit</b>  with 4 fast switch outputs and serial interface with 4 fast switch outputs and serial interface and scalable analog output	<b>6.572.0118.D05</b>
	<b>6.572.0118.D95</b>

Further Kübler accessories can be found at: [kuebler.com/accessories](http://kuebler.com/accessories)  
 Further Kübler cables and connectors can be found at: [kuebler.com/connection-technology](http://kuebler.com/connection-technology)

## Technical data

Mechanical characteristics	
<b>Maximum speed</b>	12000 min <sup>-1</sup>
<b>Protection</b>	model 1 IP67 acc. to EN 60529 model 2 IP68 / IP69k acc. to EN 60529, DIN 40050-9 and humidity tested acc. to EN 60068-3-38, EN 60068-3-78
<b>Working temperature</b>	-20 °C ... +80 °C [-4 °F ... +176 °F]
<b>Shock resistance</b>	5000 m/s <sup>2</sup> , 1 ms
<b>Vibration resistance</b>	300 m/s <sup>2</sup> , 10 ... 2000 Hz
<b>Pole gap</b>	5 mm from pole to pole
<b>Housing (sensor head)</b>	aluminum
<b>Cable</b>	2 m [6.56'] long, PUR 8 x 0.14 mm <sup>2</sup> [AWG 26], shielded, may be used in trailing cable installations
<b>Status LED</b>	green pulse index red error; speed too high or magnetic fields too weak

Electrical characteristics					
Output circuit	RS422	Push-pull			
<b>Supply voltage</b>	4.8 ... 26 V DC	4.8 ... 30 V DC			
<b>Power consumption (no load)</b>	typ. 25 mA max. 60 mA	typ. 25 mA max. 60 mA			
<b>Permissible load/channel</b>	120 ohm	+/- 20 mA			
<b>Min. pulse edge interval</b>	1 µs	1 µs			
<b>Signal level</b>	HIGH min. 2.5 V LOW max. 0.5 V	min. +V - 2.0 V max. 0.5 V			
<b>Reference signal</b>	1 x per revolution				
<b>System accuracy</b>	typ. 0.3° with shaft tolerance g6				
<b>Pulse rate [ppr]<sup>1)</sup></b>	<b>1000</b>	<b>1024</b>	<b>2000</b>	<b>2048</b>	<b>3600</b>
max. speed min <sup>-1</sup> without using reference sig.	9000	9000	4000	4000	2500
max. speed min <sup>-1</sup> using reference signal	3000	2000	3000	2000	1700

Approvals	
<b>CE compliant</b> in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU

## Terminal assignment

Output circuit	Type of connection	Cable (isolate unused cores individually before initial start-up)									
1, 2	1, A	Signal:	0 V	+V	A	$\bar{A}$	B	$\bar{B}$	0	$\bar{0}$	$\perp$
		Core color:	WH	BN	GN	YE	GY	PK	BU	RD	shield <sup>2)</sup>

- +V: Supply voltage encoder +V DC
- 0 V: Supply voltage encoder ground GND (0 V)
- A,  $\bar{A}$ : Incremental output channel A
- B,  $\bar{B}$ : Incremental output channel B
- 0,  $\bar{0}$ : Reference signal
- $\perp$ : Plug connector housing (shield)


1) With an input frequency of the evaluation unit of 250 kHz.  
 2) Shield is attached to connector housing.

# Bearingless encoders

<b>Incremental, standard reference signal, magnetic</b>	<b>RLI50 (hollow shaft)</b>	<b>Push-pull / RS422</b>
---	-----------------------------	--------------------------

## Mounting orientation and permissible mounting tolerances

### Distances




- 1 Distance sensor head / magnetic ring:  
0.1 ... 1.5 [0.004 ... 0.06]  
(1 [0.04] recommended)

Pulse rate	A for distance sensor head / magnetic ring = 1 [0.04]
1000, 2000	57.0 [2.24]
1024, 2048	74.3 [2.93]
3600	80.7 [3.18]

### Torsion



### Offset



### Tilting




**Warning:** When mounting the sensor head, please ensure its correct orientation to the magnetic ring!


## Dimensions

Dimensions in mm [inch]


### Sensor head

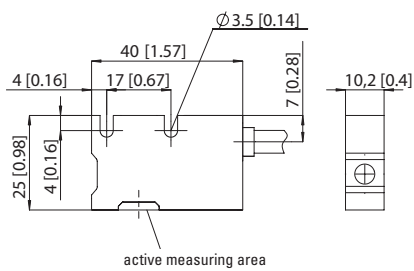


### Magnetic ring for pulse rate 1000 or 2000

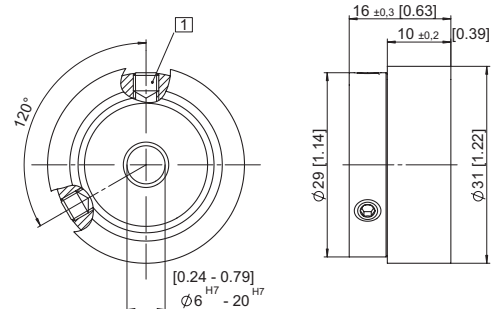

### Magnetic ring for pulse rate 1024 or 2048

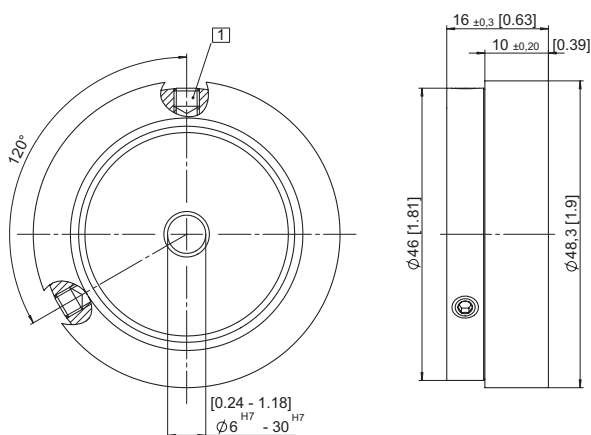

### Magnetic ring for pulse rate 3600

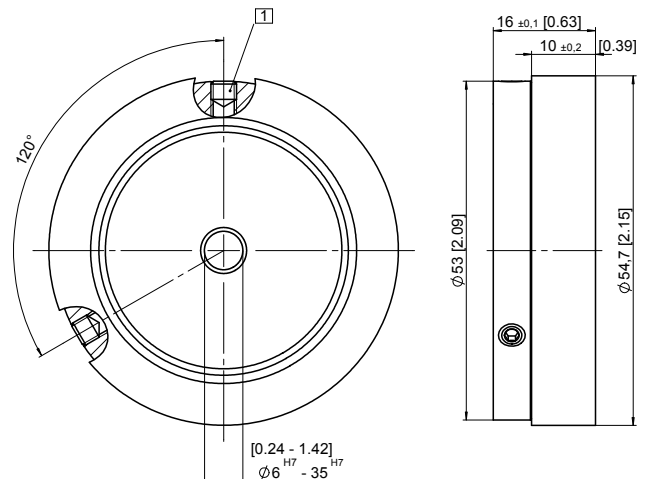

- 1 M4 set screw