

Optical fiber transmission modules

Optical fiber signal transmission	Transmitter and receiver	RS422/HTL
-----------------------------------	--------------------------	-----------





The solution where signal transmission is difficult.

The system is made up of an optical fiber transmitter and an optical fiber receiver. The optical fiber transmitter converts the electrical signals of a normal incremental encoder into a light signal for transmission by means of a glass fiber.

The receiving module converts the optical signal back into electrical signals. Up to 4 channels with inverted signals may be transmitted safely.

<p>Innovative</p> <ul style="list-style-type: none"> • Signal transmission via just a single glass fiber. • Safe signal transmission up to 2000 m. • Input frequency up to 400 kHz. • Input level 10 ... 30 V or RS422. • Inverted input signals. • Resists extremely strong electro-magnetical fields. • Signal transmission from several sensors possible thanks to 8 independent signal channels. <p>Compact</p> <ul style="list-style-type: none"> • Can be installed even where space is tight. • Minimal installation depth. • Connections plug-in HD-Sub-D15 or terminal clamp. 	<p>Application areas</p> <ul style="list-style-type: none"> • Process control technology and automation technology. • Applications sensitive to interference. • High voltage plants. • Plants with long transmission distances. • Potential separation. • Explosive areas.
--	---

Order code	Optical fiber transmitter / receiver	6.LWLX.XX
a	b Input or output circuit / Power supply	c Type of connection
S = Optical fiber transmitter E = Optical fiber receiver	1 = RS422 / 10 ... 30 V DC 2 = HTL, without inverted signals / 10 ... 30 V DC (only for optical fiber transmitter) 4 = RS422 / 5 V DC 5 = HTL / 10 ... 30 V DC, input	0 = Terminal clamp 1 = Plug-in connector HD-Sub-D15
		<i>Scope of delivery:</i> - Optical fiber module - Multilingual operating manual
		Optical fiber transmitter versions can be combined with any version of the optical fiber receivers.

Accessories		Order no.
<p>Simplex Patch cable ST-ST - Multimode</p> 	<p>Connector: 2 x ST/PC Glass fiber: 1 x 50/125 bending radius min.: static 30 mm [1.18"] dynamic 60 mm [2.36"]</p>	<p>05.B09-B09.821-XXXX</p> <p>XXXX = Length in m Standard lengths: 2 m, 5 m, 8 m, 10 m, 15 m, 20 m, ... (in 5 m steps)</p>
<p>ST Multimode coupling</p> 	<p>Barrel: ceramic, slotted</p>	<p>05.LWLK.001</p>

Optical fiber transmission modules

Optical fiber signal transmission Transmitter and receiver RS422/HTL

Technical data

General technical data	
Power supply	10 ... 30 DC V eg. 5 V DC $\pm 5\%$
Power consumption per module	< 2 W
Operating voltage reverse connection protection	available
Encoder inputs optical fiber transmitter channels	A, \bar{A} , B, \bar{B} , C, \bar{C} , D, \bar{D}
Max. input frequency optical fiber transmitter and output frequency optical fiber receiver	400 kHz
Input level optical fiber transmitter	10 ... 30 V or RS 422
Optical wavelength	850 nm
Optical transmission rate	120 Mbit/s
Optical fiber synchronisation display	LED on the receiver
Optical fiber connection	ST connector, \varnothing 9 mm [0.35] on the bottom side of the housing
Glass fiber	multimode fiber, 50/125 μ m, 62.5/125 μ m

Input signals sampling rate	10 MSamples/s	
Optical fiber transmission distance	max. 2000 m [6561']	
Dimensions (W x L x H)	Terminal clamp	22.5 x 110.8 x 88.4 mm [0.89 x 4.36 x 3.48"]
	Plug-in connector	19.0 x 110.8 x 88.4 mm [0.75 x 4.36 x 3.48"]
Protection acc. to EN 60529	IP40, terminals IP20	
Terminals	protected against contact	
	max. conductor diameter	2.5 mm ² [AWG 23]
Temperature range	-10°C ... +60°C [+14°F ... +140°F]	
Weight	approx. 95 g [3.35 oz]	

Approvals	
CE compliant in accordance with	EMC Directive 2014/30/EU
UKCA compliant in accordance with	EMC Regulations S.I. 2016/1091

Terminal assignment

Type of connection	Terminal clamp, optical fiber transmitter and receiver											
0	Signal:	\bar{A}	\bar{B}	\bar{C} (0)	A	B	C (0)	\bar{D}	D	+V	0 V linked internally	Shield
	Terminal:	1	2	3	4	5	6	7	10	8	9, 11, 12	–


Type of connection	HD-Sub-D15, 3-row, optical fiber transmitter											Terminal		
1	Signal:	\bar{A}	\bar{B}	\bar{C} (0)	A	B	C (0)	\bar{D}	D	+V out to encoder	0 V linked internally	Shield	0 V	+V in to encoder, linked internally
	Pin female contact:	8	6	3	9	7	4	1	2	15	13	11, 12	1	2

Type of connection	HD-Sub-D15, 3-row, optical fiber receiver											Terminal		
1	Signal:	\bar{A}	\bar{B}	\bar{C} (0)	A	B	C (0)	\bar{D}	D	+V out power supply	0 V linked internally	Shield	0 V	+V in power supply, linked internally
	Pin female contact:	8	6	3	9	7	4	1	2	15	13	11, 12	1	2

Dimensions

Dimensions in mm [inch]

Terminal clamp

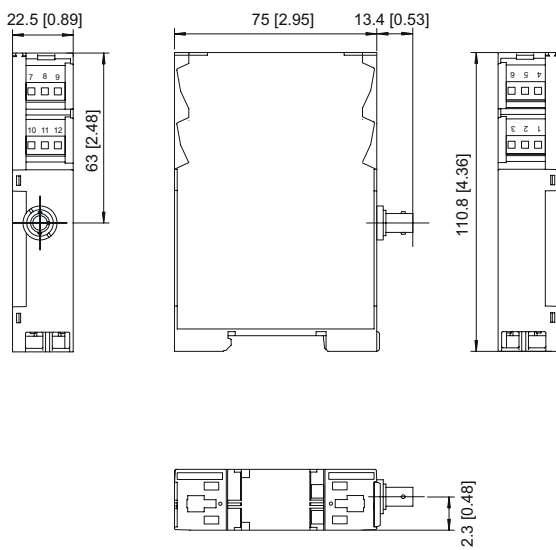

Plug-in connector, HD-Sub-D15

